




# Samsung Galaxy Prevail 2 Rear Facing Camera Replacement

If your current camera does not work and is damaged, this will show you how to replace it.

Written By: Alexandra Hernandez

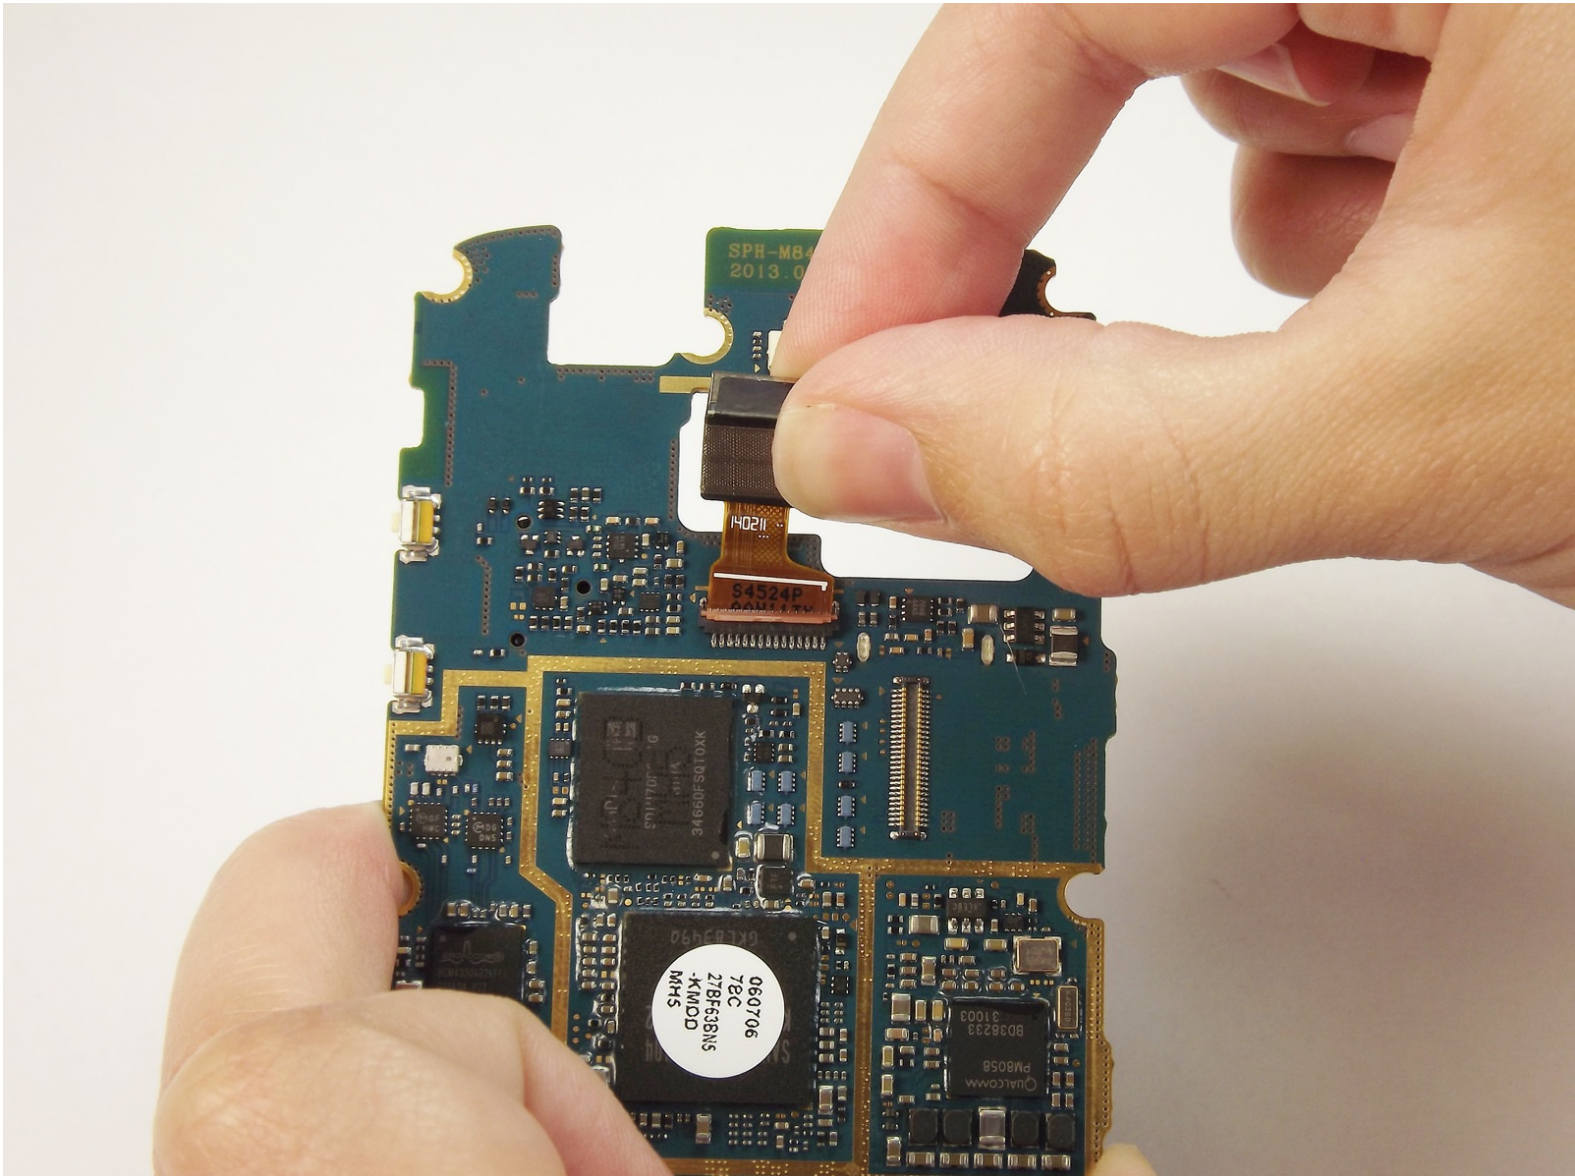

## INTRODUCTION

This guide will show you how to locate and replace the camera for the Samsung Galaxy Prevail 2. No background information is required.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Removing Back Casing



- Using your finger nails or the spudger; pry the plastic casing open, and pull away from the body of the phone.

## Step 2 — Remove Battery



- Gently pull the battery out of the phone.



### Step 3 — Remove Screws





- Unscrew all of the screws.
- ⓘ Be sure to set the screws aside in a safe place.

### Step 4 — Pry Off Back Of Phone






- Insert the plastic prying tool between the silver frame and the white face of the phone to pry off the front frame.
- ⓘ Make sure to pry around the entire frame before attempting to loosen it.
- Push the motherboard out using your thumbs as shown

## Step 5 — Open Up The Motherboard

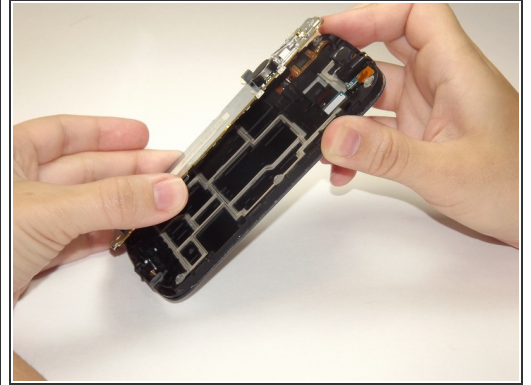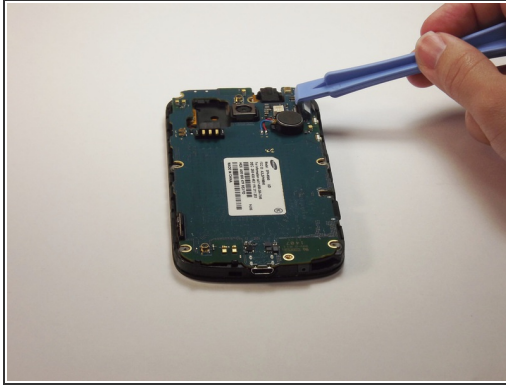

- Lift the flap up using the plastic prying tool.


## Step 6 — Detach Motherboard

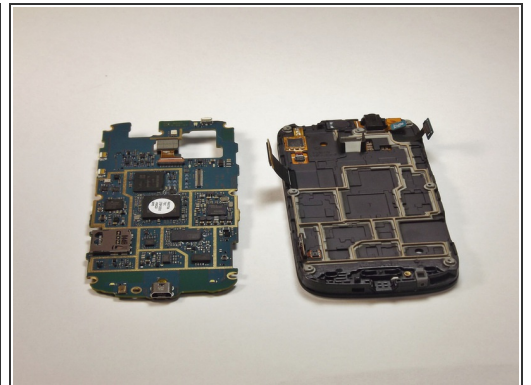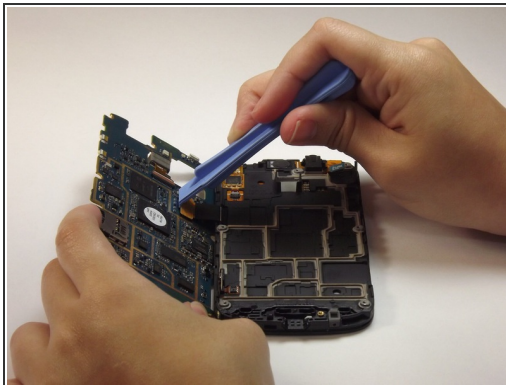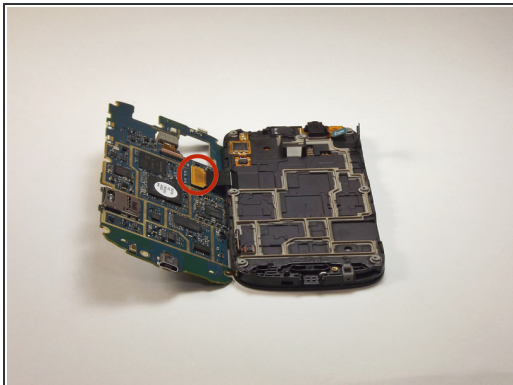

- Lift the second flap to detach the motherboard completely.




## Step 7 — Locate Camera

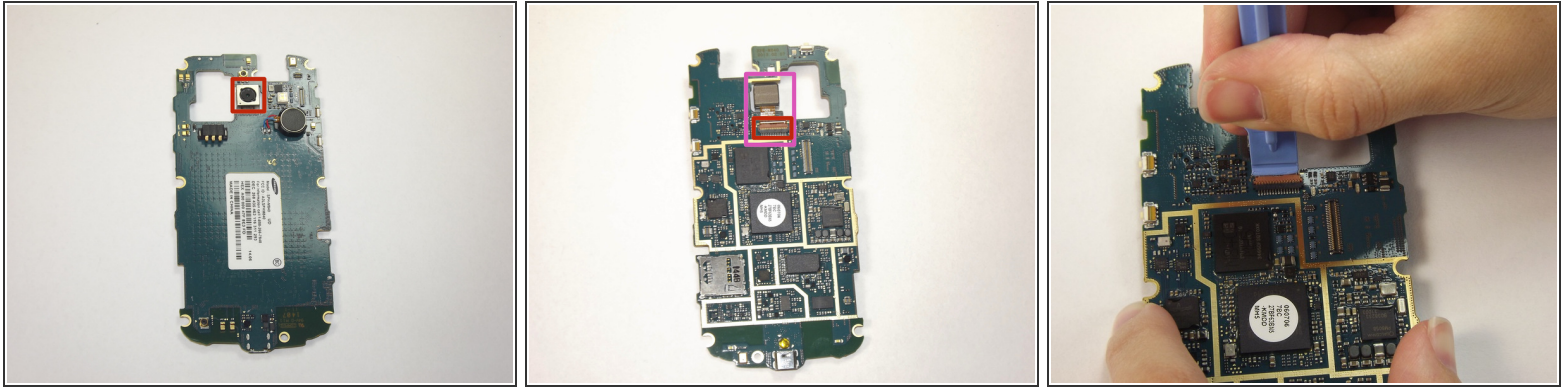

- With plastic prying tool, lift the flap connected to the camera (indicated in red) to remove it.

**i** Be sure that you are looking at the back face of the motherboard.

## Step 8 — Detach Camera

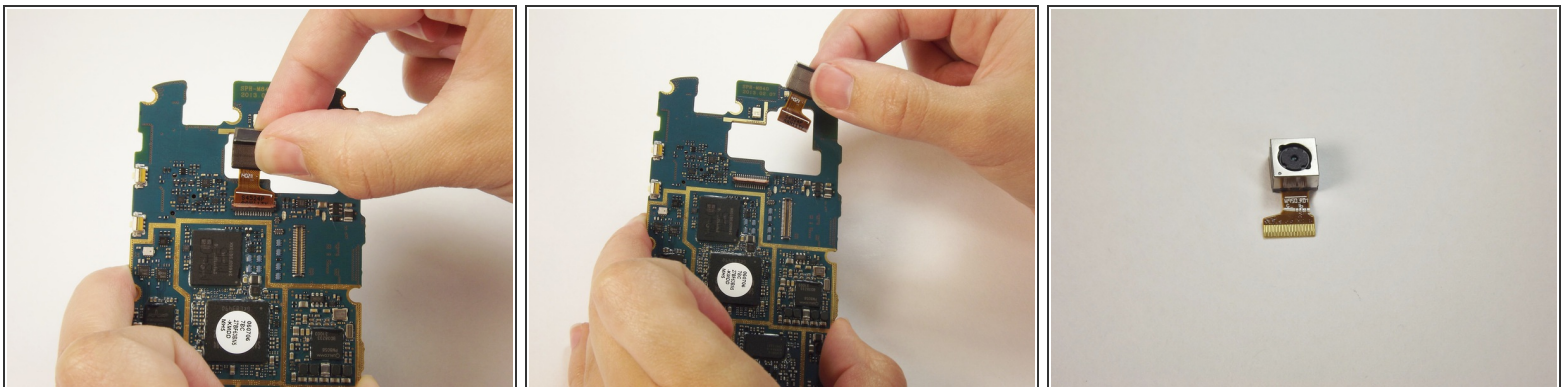

- Carefully lift and remove the camera from its position.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 12:04:11 PM.